

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
5 February 2004 (05.02.2004)

PCT

(10) International Publication Number
WO 2004/011129 A1

(51) International Patent Classification⁷: B01D 59/34

(21) International Application Number:
PCT/KR2002/001749

(22) International Filing Date:
18 September 2002 (18.09.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002/44828 30 July 2002 (30.07.2002) KR

(71) Applicants (for all designated States except US): KO-
REA ATOMIC ENERGY RESEARCH INSTITUTE
[KR/KR]; 150 Dukjin-dong, Yusung-gu, 305-353 Dae-
jeon (KR). KOREA HYDRO & NUCLEAR POWER
CO., LTD. [KR/KR]; 167 Samsung-dong, Kangnam-gu,
135-090 Seoul (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): JEONG,
Do-Young [KR/KR]; 106-1006 Expo Apt., Jeonmin-dong,

Yuseong-gu, 305-761 Daejeon (KR). KO, Kwang-Hoon
[KR/KR]; 308-501 Cheongsol Apt., Songkang-dong,
Yuseong-gu, 305-752 Daejeon (KR). LIM, Gwon
[KR/KR]; 25-91 Sambu Apt., Taepyung 2-dong, Jung-gu,
301-774 Daejeon (KR). KIM, Cheol-Jung [KR/KR];
101-1803 Hanbit Apt., Uheun-dong, Yuseong-gu, 305-755
Daejeon (KR).


(74) Agent: SON, Won; C & S Patent and Law Office,
C-2306 Daelim Acrotel, 467-6 Dogok-dong, Kangnam-gu,
135-971 Seoul (KR).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK,
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,
MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI,
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW).
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM).
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: METHOD FOR ISOTOPE SEPARATION OF THALLIUM

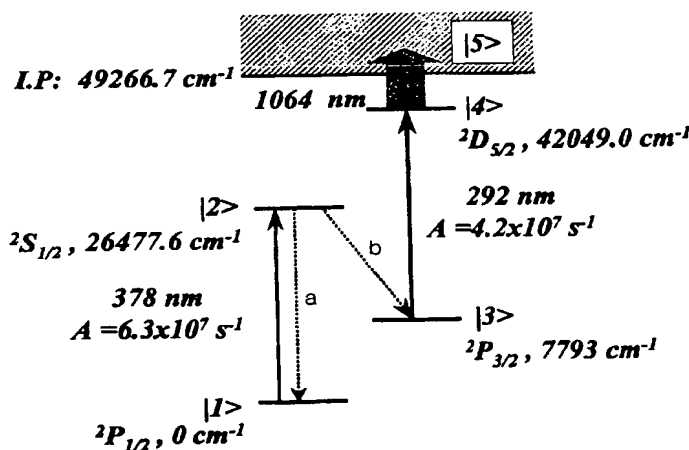

(57) Abstract: A method for isotope separation of thallium using laser beam is disclosed. The method comprises the steps of: (a) producing photons of a first frequency by a laser system, wherein said first frequency is about 378 nm; (b) producing photons of a second frequency by said laser system, wherein said second frequency is about 292 nm; (c) producing photons of a third frequency by said laser system, wherein said third frequency is in the range of 700 nm to 1400 nm; (d) applying said photons of said first, second and third frequencies to said vapor of said thallium, wherein said photons of said first frequency pump isotope-selectively a plurality of ground state thallium atoms through an excited state into a metastable state, and wherein said photons of said second frequency excite a plurality of metastable state thallium atoms to an intermediate, resonant state, and wherein said photons of said third frequency ionize a plurality of atoms in said intermediate, resonant state through continuum states; and (e) collecting said isotope ions. Thallium isotope can efficiently be separated with small scale facilities.

WO 2004/011129 A1

WO 2004/011129 A1



ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report

7/PRTS

METHOD FOR ISOTOPE SEPARATION OF THALLIUM

BACKGROUND OF THE INVENTION

5 Field of the Invention

The present invention relates in general to a method for isotope separation of thallium, and more particularly to laser isotope separation of thallium using laser beam.

10 Description of the Prior Art

In nature, thallium contains two isotopes, including ^{203}Tl (29.5 %) and ^{205}Tl (70.5 %). ^{203}Tl is used as a source material to produce ^{201}Tl radioisotope. ^{201}Tl is produced in a cyclotron by irradiating the enriched ^{203}Tl target with a 19-31 MeV proton beam according to the $^{203}\text{Tl}(p, 3n)^{201}\text{Tl}$ reaction. $^{201}\text{TlCl}$ is a
15 radiopharmaceutical for SPECT (single photon emission computerized tomography) to diagnose heart diseases and tumors.

Electromagnetic method is the unique commercialized one to separate thallium isotopes. In principle, the technique is simple. When passing between the poles of a magnet, a monoenergetic beam of ions of naturally occurring thallium
20 splits into two streams according to their momentum, one per isotope, each characterized by a particular radius of curvature. Collecting cups at the ends of the semicircular trajectories catch the homogenous streams. It is generally agreed that electromagnetic separation represents the most versatile technology with the greatest experience base of any separation technology, but unfortunately it has low
25 throughput and high operating cost.

Laser isotope separation (LIS) technique employing isotope-selective photoionization process of atoms has been said to be an alternative to overcome the demerits of electromagnetic method. The technique has been demonstrated on a number of elements, including mercury, gadolinium, and other elements. US
30 patent Nos. 4,793,307 (1988), 5,202,005 (1993), 5,376,246 (1994), and 5,443,702 (1995) are related to laser isotope separation of mercury(Hg), gadolinium(Gd), zirconium (Zr), and erbium(Er) atoms, respectively. Japanese patent publication No. 1999-99320A suggests a new photoionization pathway different from that of US

patent No. 4,793,307 (1988).

The determination whether LIS of a certain element is technically feasible or not requires detailed consideration of a variety of issues including the photoionization pathway, the associated lasers, and the atomic vapor. A definitive
5 evaluation of the applicability of LIS requires knowledge of the isotope shifts, hyperfine structures, level energies, angular momentum of each level, level lifetimes, etc. For those cases where LIS is technically feasible, an economic evaluation can be performed in the consideration of the cost competitiveness of this technique against other techniques, which requires knowledge of physical and chemical
10 properties of the element, required laser power, isotope selectivity and ionization efficiency of the photoionization process, etc.

Thallium has no available autoionization levels and isotope shifts of thallium energy levels are relatively small compared with other elements. Accordingly, photoionization of thallium atoms through an autoionization level is not
15 possible and also isotope selectivity might be very small for the conventional stepwise photoionization process, which was applied in the US patents 4,793,307 (1988) and 5,443,702 (1995). Furthermore, it may not be possible to separate the thallium isotopes using the angular momentum selection rule applied in the US patent 5,202,005 (1993) since the nuclear magnetic moments of ^{203}Tl and ^{205}Tl are all
20 the same.

Japanese patent publication No. 2000-262866A adapts the isotope-selective excitation and field ionization method for thallium isotope separation, which was disclosed in US patent 5,945,649 for ^{210}Pb removal from lead isotopes. In this patent, thallium atoms in the ground state are isotope-selectively excited to a
25 Rydberg state at the energy of about $49,000\text{ cm}^{-1}$ by two lasers of 377.6 nm and 443.7 nm wavelengths and they are field-ionized by an external electric field. During the excitation process, detuning of about 1 GHz is given between laser frequencies and the intermediate level at the energy of $26,477\text{ cm}^{-1}$. This is a 2-color 2-photon excitation process. To obtain high isotope selectivity as well as
30 high excitation efficiency by using 2-photon excitation process, lasers should have nearly Fourier-transform-limited bandwidth and also should counter-propagate. The Stark shift caused by detuning from the intermediate level decreases the 2-photon excitation efficiency. To avoid this, laser powers and frequencies should

be controlled finely according to the π -pulse condition and also laser pulses should be overlapped exactly. Since it is practically impossible to overlap the laser pulses during the entire counter-propagation in medium, drop of the excitation efficiency is inevitable. Furthermore, for the case of mass production of thallium isotopes, initially produced plasma may screen the external electric field and consequently decreases the field ionization efficiency. For these reasons, although the Japanese patent publication No. 2000-262866A may be technically feasible, there might be several obstacles to overcome for this method to be commercially practical.

Hence it is an object of the present invention to solve the above mentioned problems and also to provide an improved practical thallium isotope separation method.

SUMMARY OF THE INVENTION

In accordance with the present invention, there is provided a method for separating an isotope of thallium in an atomic vapor containing a plurality of isotopes of thallium including said isotope, said method comprising the steps of :

(a) producing photons of a first frequency by a laser system, wherein said first frequency is about 378 nm;

(b) producing photons of a second frequency by said laser system, wherein said second frequency is about 292 nm;

(c) producing photons of a third frequency by said laser system, wherein said third frequency is in the range of 700 nm to 1400 nm;

(d) applying said photons of said first, second and third frequencies to said vapor of said thallium, wherein said photons of said first frequency pump isotope-selectively a plurality of ground state thallium atoms through an excited state into a metastable state, and wherein said photons of said second frequency excite a plurality of metastable state thallium atoms to an intermediate, resonant state, and wherein said photons of said third frequency ionize a plurality of atoms in said intermediate, resonant state through continuum states; and

(e) collecting said isotope ions.

BRIEF DESCRIPTION OF THE DRAWING

The present invention together with the above and other objects and advantages may best be understood from the following detailed description of the preferred embodiments of the invention illustrated in the drawings, wherein:

- Fig.1 illustrates the conceptual diagram for thallium laser isotope separation method according to the present invention;
(a) is front view and (b) is side view.
- Fig.2 shows a partial energy level diagram of thallium atoms;
- Fig.3 shows isotope shifts and hyperfine structures of thallium isotopes;
- Fig.4 shows the experimentally measured optical pumping spectrum of thallium isotopes by using a CW laser which has Gaussian intensity distribution (full width at half maximum: 10 mm) and output power of 20 mW;
- Fig.5 shows is the calculated optical pumping spectrum of thallium isotopes by using a CW laser which has Gaussian intensity distribution (full width at half maximum: 10 mm) and output power of 200 mW;
- Fig.6 shows the measured photoionization cross-section of $7^2D_{5/2}$ level of thallium atoms at the wavelength of 1064 nm of a Nd:YAG laser; and
- Fig.7 shows the observed mass spectra of isotope-selective photoionization of thallium atoms;
(a) shows the mass spectra of non-selectively photoionized thallium atoms,
(b) shows the mass spectra when the frequency of optical pumping laser is resonant with ^{205}Tl isotopes, and
(c) shows the mass spectra when the frequency of optical pumping laser is resonant with ^{203}Tl isotopes.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Herein is disclosed an isotope-selective photoionization process and apparatus for thallium isotope separation from natural thallium that involves isotope-selective optical pumping followed by photoionization of thallium atoms and then

electrostatic extraction of ions. This scheme takes advantages of the large optical pumping cross-section as well as the large photoionization cross-section, and consequently only modest laser fluences are required. According to this scheme, it is possible to photoionize target isotopes selectively and efficiently by employing both isotope selective optical pumping (ISOP) of target isotopes into a metastable state and resonant photoionization (RPI) of metastable state thallium isotopes. In the latter process, metastable thallium atoms are photoionized to continuum states through a resonant excited state. Efficient ISOP of the target isotopes can be achieved with a single frequency continuous wave (CW) laser. A pulsed UV laser and a high power pulsed IR laser are used for RPI process.

^{203}Tl laser isotope separation based on this invention is economically more efficient than the conventional electromagnetic separation. Also, this invention can overcome the limited scope of the Japanese patent publication No. 2000-262866A. In conclusion, the present invention makes the ^{203}Tl isotope separation possible for the mass production even with a relatively small-scale facility and the commercially available lasers.

An example of the present invention will now be described in greater detail for a thallium laser isotope separation method with reference to more specific drawing and data, which are for a better understanding of the invention and not for limiting purposes.

Fig.1 illustrates the conceptual diagram for thallium laser isotope separation method. Thallium atomic beam 2 is generated by heating thallium at an temperature between 800-1000°C using thermal heater 1 and collimated by an atomic beam collimator 3, and then is optically and isotope-selectively pumped into a metastable state by a CW laser 4. The optically pumped thallium isotopes are photoionized by a pulsed UV laser 5 and a pulsed IR laser 6. The photoionized thallium ions 8 and electrons 9 generated during the photoionization are separated from the atomic beam by an extractor 7 biased by an external electric field.

Fig. 2 shows a partial energy level diagram of thallium atoms when thallium ions are separated according to the present invention. The target isotopes in the ground state $|1\rangle$ are optically and isotope-selectively excited to the level $|2\rangle$ by a CW laser. The excited isotopes in the level $|2\rangle$ may be either de-excited to the

ground level $|1\rangle$ by a spontaneous decay process (a in Fig. 2) or pumped into the metastable state $|3\rangle$ (b in Fig. 2). While the target isotopes stay in the metastable state $|3\rangle$, the de-excited isotopes to the ground state $|1\rangle$ can be excited to the level $|2\rangle$ again. Because the lifetime of the metastable state is long enough (about 250 μsec), most of the target isotopes can be pumped into the metastable state $|3\rangle$ by the repeated excitation and decay processes. On the other hand, non-target isotopes are not excited and stay in the ground state. As a result, high optical pumping efficiency as well as high target isotope selectivity can be achieved. The target isotopes pumped into the metastable state $|3\rangle$ will be photoionized to the continuum state $|5\rangle$ through the resonant excited state $|4\rangle$ by pulsed lasers.

Thallium atoms have such a simple electronic structure that only three energy states exist below energy of $30,000\text{ cm}^{-1}$, such as the ground state ($6^2P_{1/2}$: 0 cm^{-1}), metastable state ($6^2P_{3/2}$: $7,793\text{ cm}^{-1}$), and the excited state ($7^2S_{1/2}$: $26,477.6\text{ cm}^{-1}$). And thallium atoms have several advantages for efficient optical pumping. These are:

- (a) large electric dipole moment of the transition between $6^2P_{1/2}$ and $6^2S_{1/2}$
- (b) very short level lifetime of $6^2S_{1/2}$ (7.5 nsec)
- (c) branching ratio of the transition between $6^2S_{1/2}$ and the metastable state is bigger than that of the transition between $6^2S_{1/2}$ and the ground state.

Hence, very efficient pumping of thallium atoms into the metastable state can be easily achieved if a CW laser frequency (about 378 nm in the wavelength) is resonant to the transition line of $6^2P_{1/2}$ and $6^2S_{1/2}$. Because the metastable state population of thallium atoms is lower than 10^{-3} when thallium is heated at temperature to generate an atomic beam, their initial population does not affect on the isotope selectivity at this temperature range.

Fig. 3 shows isotope shifts and hyperfine structures of thallium isotopes related to the optical pumping transitions. The isotope shift of the transition between $6^2P_{1/2}$ and $7^2S_{1/2}$ is about 1.6 GHz and about 1.5 GHz for $F_g = 1 \rightarrow F_e = 1$ and $F_g = 0 \rightarrow F_e = 1$, respectively. Hence, highly selective optical pumping of the target isotope into the metastable state is possible if Doppler width of an atomic beam is less than a few hundred MHz (for example, approximately 100 MHz) and a single frequency CW laser is used as an optical pumping laser.

Fig.4 shows the experimentally measured optical pumping spectrum of the

transition of $F_g = 1 \rightarrow F_e = 1$ by using a CW laser which has Gaussian intensity distribution (full width at half maximum: 10 mm) and output power of 20 mW. And Fig.5 shows the calculated optical pumping spectrum of the same transition, assuming that a CW laser has Gaussian intensity distribution (full width at half maximum: 10 mm) and output power of 200 mW. It is clearly shown that the isotope selectivity is very high in this optical pumping process.

While the hyperfine splitting of the ground state is about 21 GHz, that of the metastable level is about 500 MHz. Hence, effective photoionization of the metastable state atom is expected without interferences of hyperfine structures. Even with a relatively low power laser, metastable thallium atoms can be efficiently excited to the state $7^2D_{3/2}$ ($42,011.4 \text{ cm}^{-1}$) or to the state $7^2D_{5/2}$ ($42,049.0 \text{ cm}^{-1}$) because of their large electric dipole moments. The transition wavelength for the excitation is about 292 nm. Fig.6 shows the measured photoionization cross-section of $7^2D_{5/2}$ level of thallium atoms at the wavelength of 1064 nm of a Nd:YAG laser. The photoionization cross-section of $2.7 \times 10^{-17} \text{ cm}^2$ is so big enough that more than 80 % of the thallium atoms in the excited state $7^2D_{5/2}$ can be ionized by a Nd:YAG laser with the pulse energy density of 40 mJ/pulse/cm^2 . Since the ionization potential (IP) of thallium atoms is about 49266.7 cm^{-1} , efficient photoionization is expected if an ionizing IR laser with modest power has the wavelength in the range of $700 \sim 1400 \text{ nm}$, which corresponds to energy range of $49266.7 \text{ cm}^{-1} \sim 55000 \text{ cm}^{-1}$.

Fig.7 shows the observed Time-of-Flight (TOF) mass spectra of isotope-selective photoionization of thallium atoms according to this invention. When the CW laser frequency is scanned while pulsed laser frequencies are fixed, photoionization of each thallium isotope is possible.

INDUSTRIAL APPLICABILITY

For the production of ^{203}Tl isotope with the capability of 1 kg/year, the required laser powers are estimated to be 500 mW, 4 W, and 500 W for a CW optical pumping laser, a pulsed UV laser, and a pulsed IR laser, respectively. For pulsed lasers, repetition rate of 5 kHz or more and pulse-width of a few tens of ns are also required. Such a laser system can be constructed by using commercially available lasers.

What is claimed is:

1. A method for separating an isotope of thallium in an atomic vapor containing a plurality of isotopes of thallium including said isotope, said method comprising the steps of :
- 5 (a) producing photons of a first frequency by a laser system, wherein said first frequency is about 378 nm;
- (b) producing photons of a second frequency by said laser system, wherein said second frequency is about 292 nm;
- 10 (c) producing photons of a third frequency by said laser system, wherein said third frequency is in the range of 700 nm to 1400 nm;
- (d) applying said photons of said first, second and third frequencies to said vapor of said thallium, wherein said photons of said first frequency pump isotope-selectively a plurality of ground state thallium atoms through an excited state into a metastable state, and wherein said photons of said second frequency excite a plurality of metastable state thallium atoms to an intermediate, resonant state, and wherein said photons of said third frequency ionize a plurality of atoms in said intermediate, resonant state through continuum states; and
- 15 (e) collecting said isotope ions.
- 20
2. The method of claim 1 wherein said photon of said first frequency is produced by one or more continuous wave lasers.
3. The method of claim 1 wherein said pumping is performed by applying said photons of said first frequency to pump optically and isotope-selectively said isotope of thallium from the ground state through a first excite state at an energy of 26477.6 cm^{-1} relative to the zero energy of said ground state into a metastable state at an energy of 7793 cm^{-1} relative to the zero energy of said ground state.
- 25
4. The method of claim 1 wherein said photon of said second frequency is produced by one or more pulsed lasers.
- 30
5. The method of claim 1 or 4, wherein said exciting step by the photons of

the second frequency to an intermediate, resonant state is performed by exciting the thallium atoms in the metastable state to a second excited state at an energy of 42049.0 cm^{-1} relative to the zero energy of said ground state.

5 6. The method of claim 1 or 4, wherein said exciting step by the photons of the second frequency to an intermediate, resonant state is performed by exciting the thallium atoms in the metastable state to a second excited state at an energy of 42011.4 cm^{-1} relative to the zero energy of said ground state.

10 7. The method of claim 1 wherein said photon of said third frequency is produced by one or more pulsed lasers.

 8. The method of claim 1 wherein said ionizing step by the photons of the third frequency is performed by applying said photons of said third frequency to
15 ionize atoms in said second excited state at an energy of 42049.0 cm^{-1} to continuum states at an energy range of $49266.7 \text{ cm}^{-1} \sim 55000 \text{ cm}^{-1}$ relative to the zero energy of said ground state.

 9. The method of claim 1 wherein said ionizing step by the photons of the
20 third frequency is performed by applying said photons of said third frequency to ionize atoms in said second excited state at an energy of 42011.4 cm^{-1} to continuum states at an energy range of $49266.7 \text{ cm}^{-1} \sim 55000 \text{ cm}^{-1}$ relative to the zero energy of said ground state.

25 10. The method of claim 1 wherein the step of collecting said isotope ions comprises applying an electric field to said vapor.

1/7

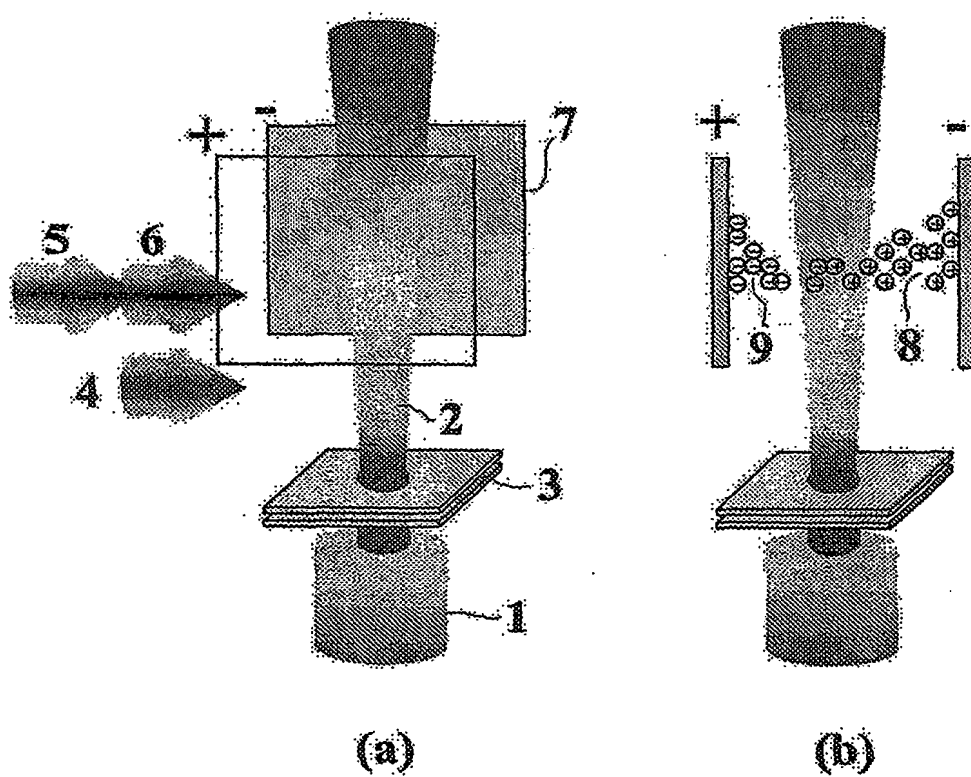


FIG. 1

Best Available Copy

2/7


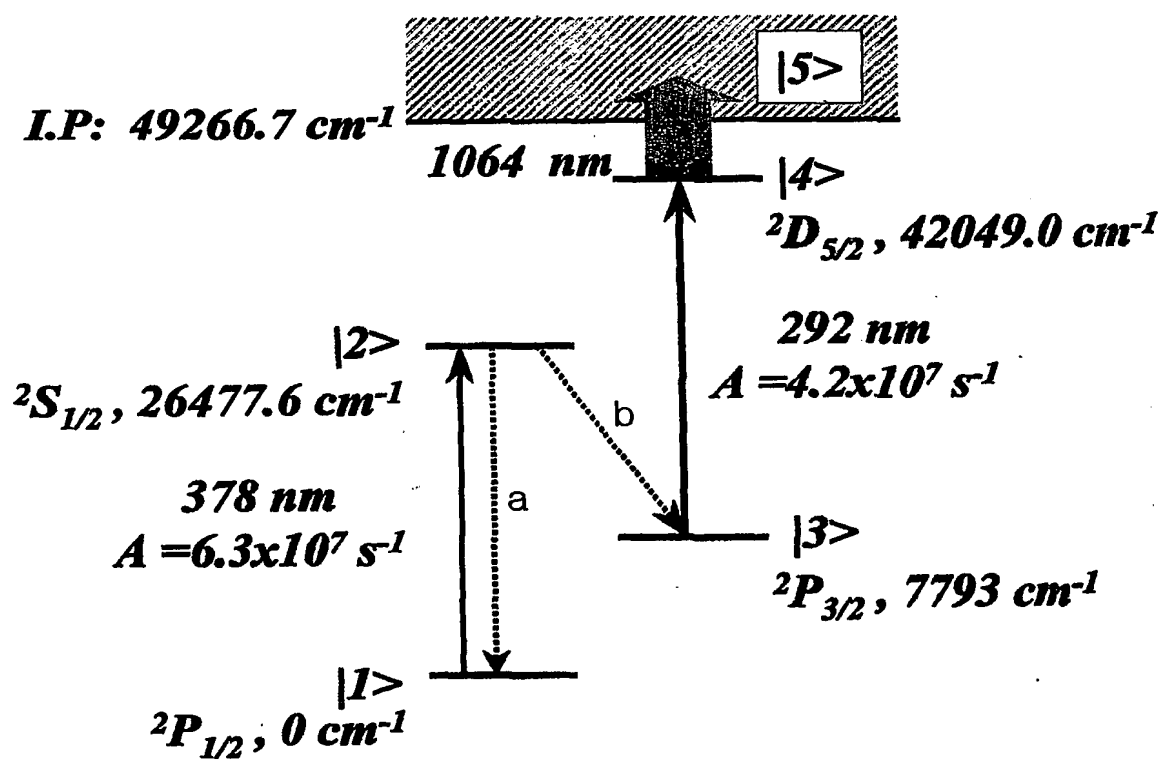


FIG. 2

Best Available Copy

3/7

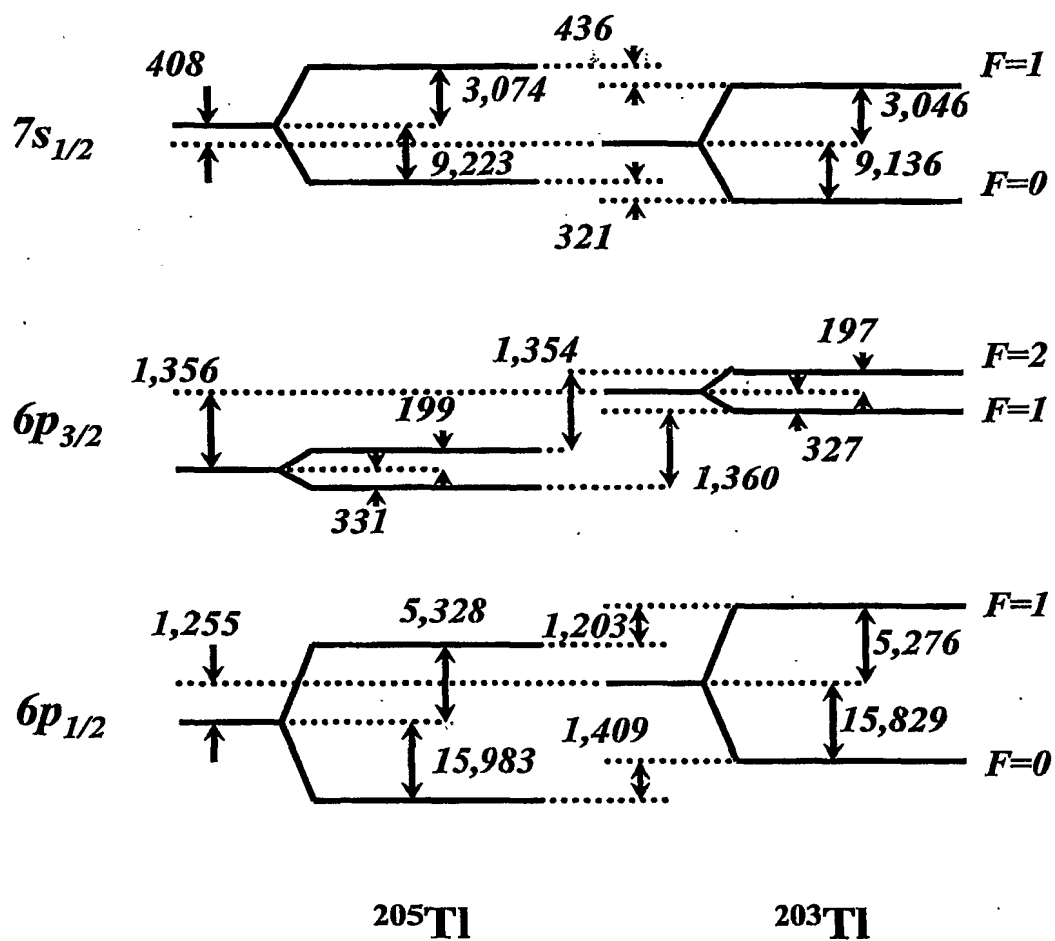

(Energy given in MHz)

FIG. 3

4/7

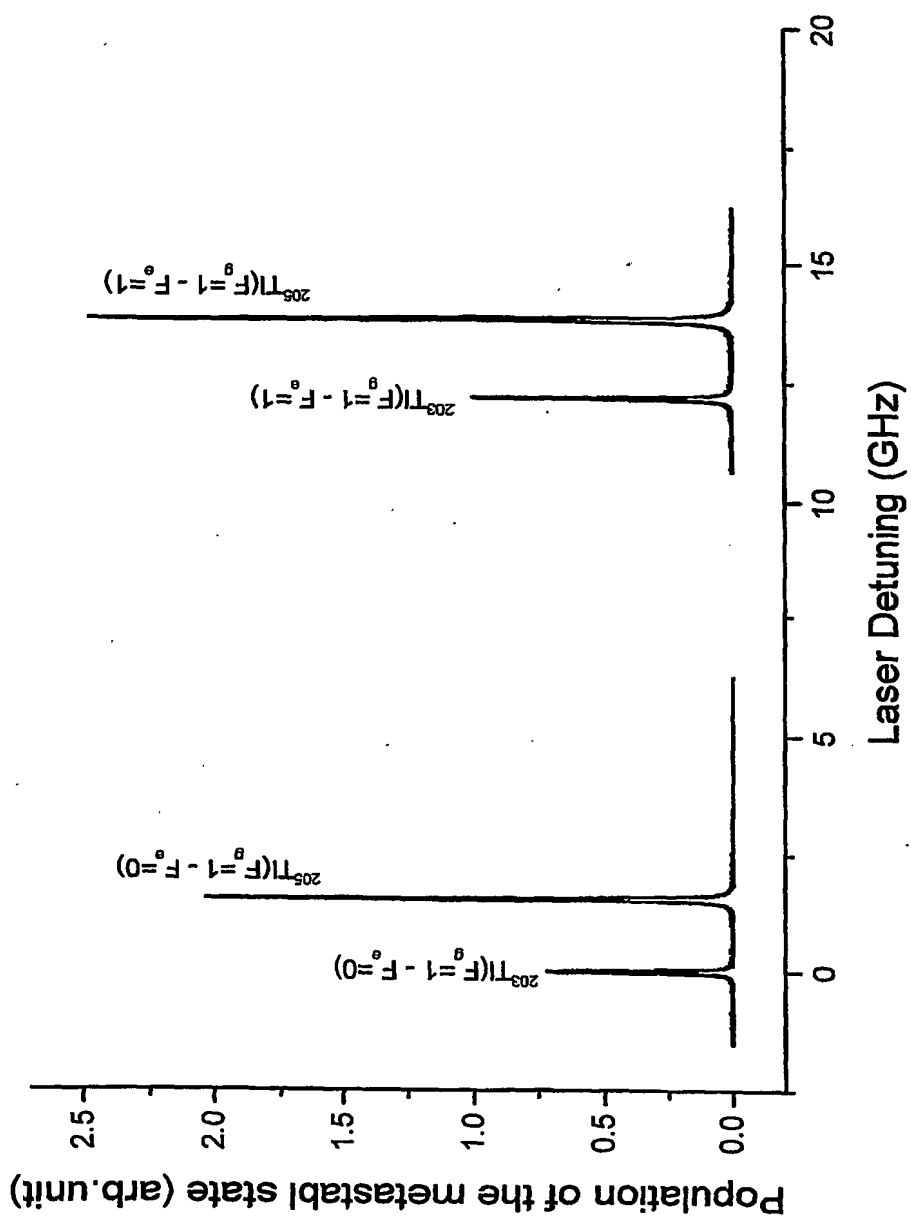


FIG. 4

5/7

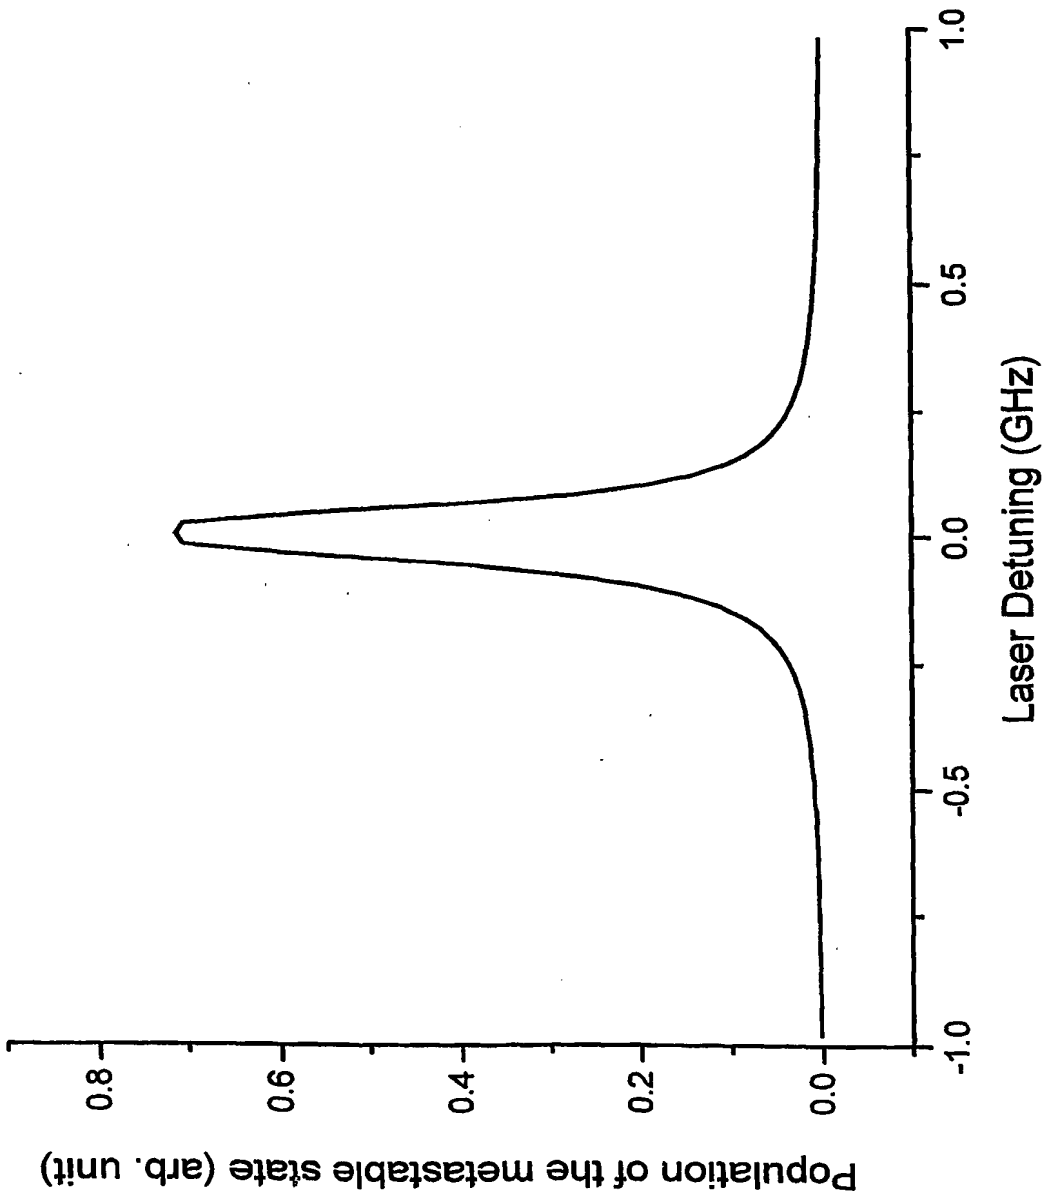


FIG. 5

6/7

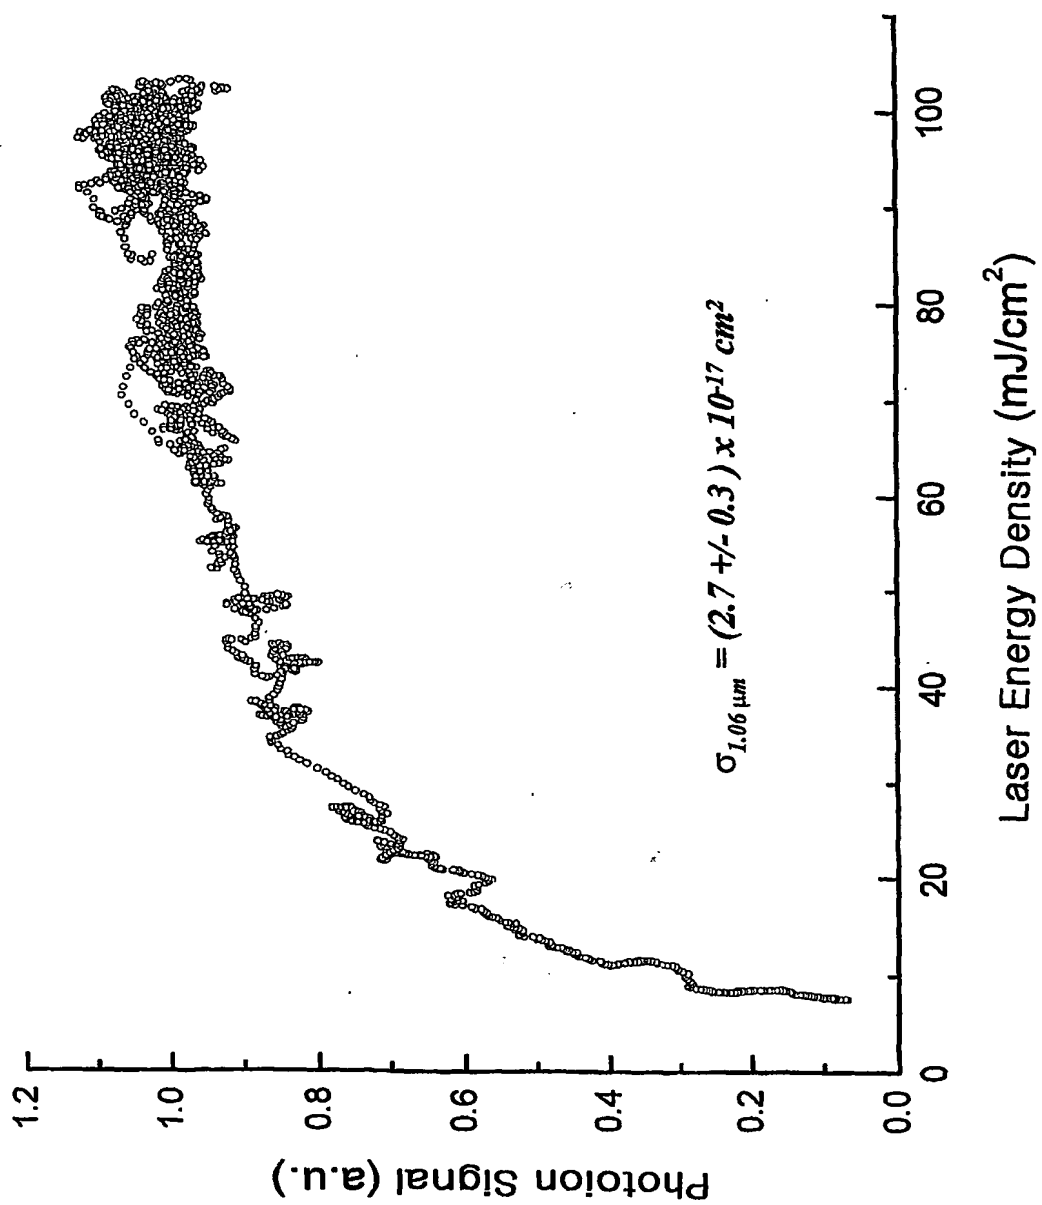


FIG. 6

7/7

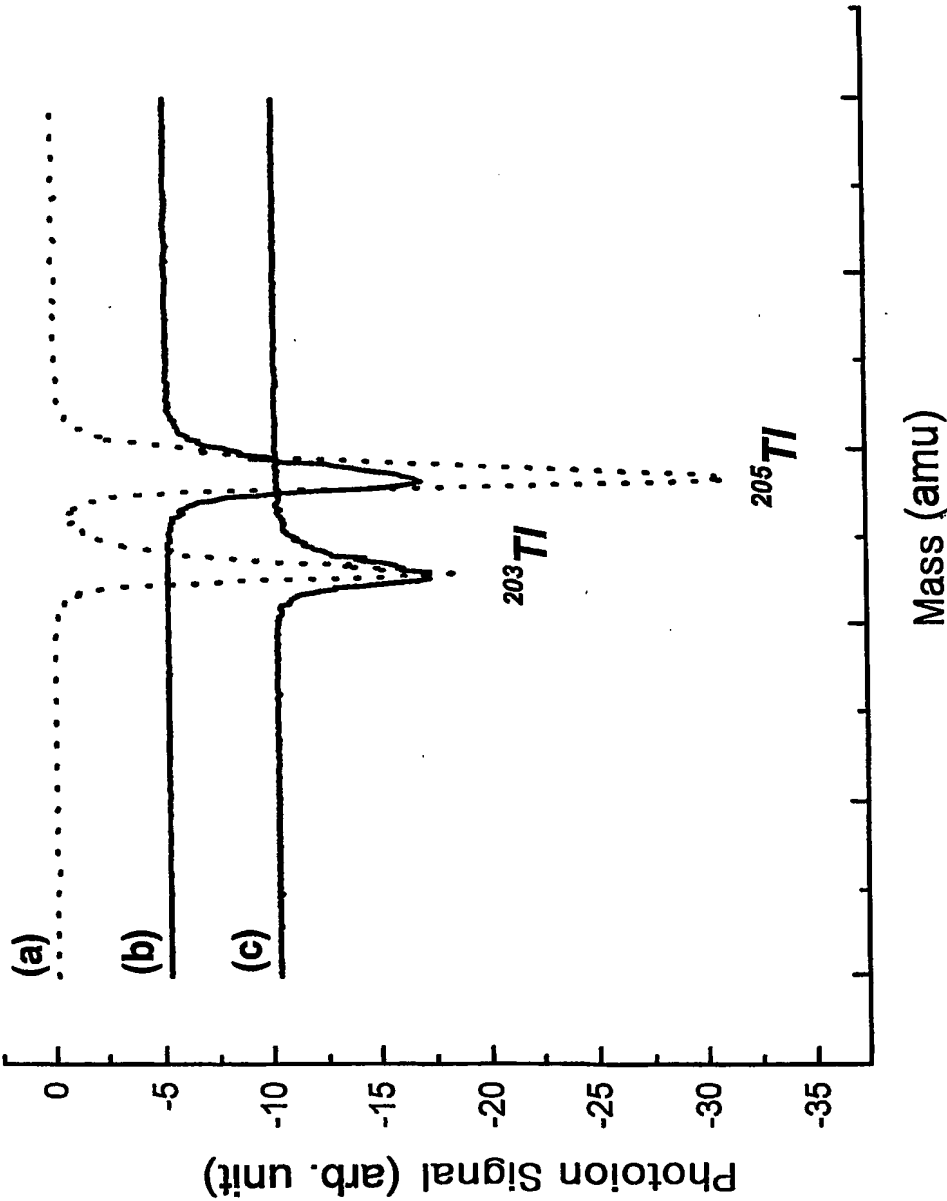


FIG. 7

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/KR02/01749

CLASSIFICATION OF SUBJECT MATTER

IPC⁷: B01D 59/34

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC⁷: B01D, C22B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, STN-Patdpa, Depatisnet

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR 2790974 A1 (US EBRICHMENT CORP.) 22 September 2000 (22.09.00) <i>claim 1, figure 5.</i>	1-10

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&“ document member of the same patent family

Date of the actual completion of the international search

25 March 2003 (25.03.2003)

Date of mailing of the international search report

10 April 2003 (10.04.2003)

Name and mailing address of the ISA/AT

Austrian Patent Office

Kohlmarkt 8-10; A-1014 Vienna

Facsimile No. 1/53424/535

Authorized officer

STEPANOVSKY M.

Telephone No. 1/53424/

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/FR 02/01749

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
FR	A1	2790974	22-09-2000	JP	A2	00262866	26-09-2000